Bruhat Bengaluru Mahanagara Palike

Providing Junction Improvement Works Under SURAKSHA-75

In Arterial and Sub Arterial roads at Minsk Square Junction, Basaveshwara Circle, Hennur Cross, Trinity Circle, LH Circle, Windsor Manor and SJP Road Junction in East Zone

1. MINSK SQUARE JUNCTION

Aim

Minsk Square Junction is situated at the intersection of Kasturba Road and Raj Bhavan Road.It is an important landmark in the city's central business district. The junction provides connectivity to several important roads and areas within Bangalore, facilitating easy access to key commercial, governmental, and recreational destinations. The area is well-served by public transportation, including buses and metro services (with Cubbon Park Metro Station nearby). Activity centers such as Cubbon park, Vidhana Soudha, Chinnaswamy Stadium City and Queen's Road attract a large volume of vehicular and pedestrian traffic. The project aims to improve the quality of pedestrian infrastructure interms of walkable footpath, ramps signages etc. and also make it inclusive.

Site Data

Location - 12.981276, 77.5969187

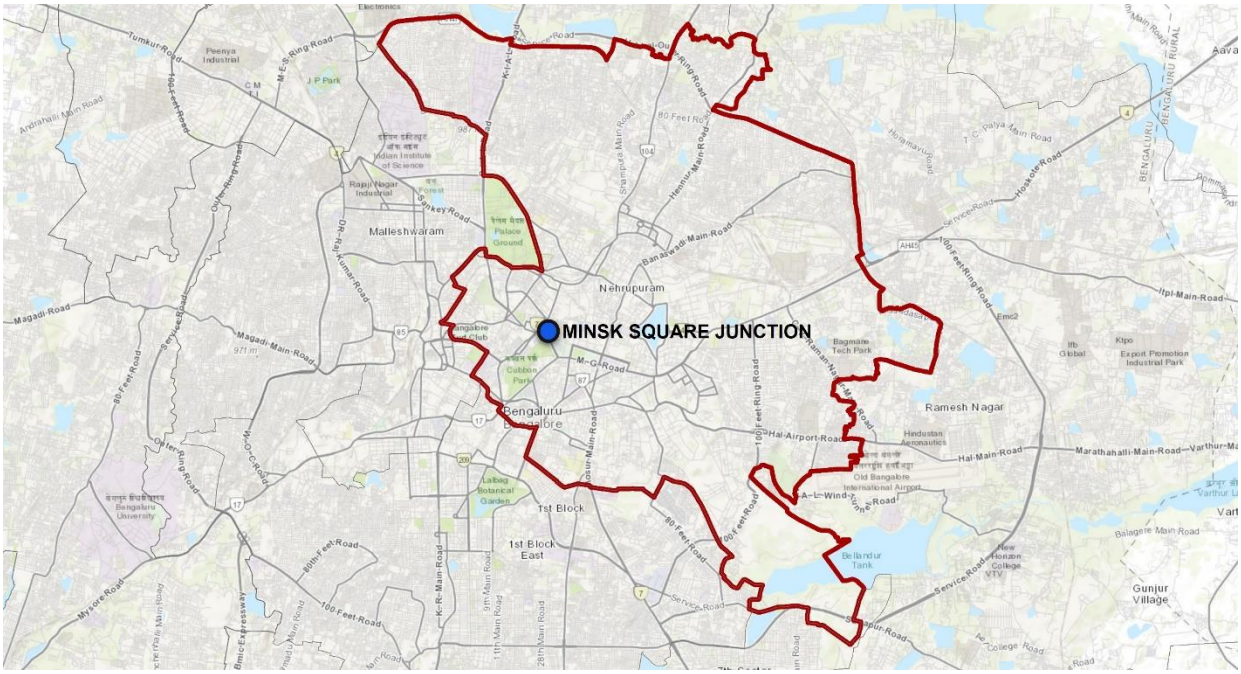

Major Scope of Works

- Drains undergo desilting to ensure the effective removal of sediments and waste materials, thereby preventing blockages and maintaining optimal drainage performance.
- Refurbishment of drains and installation of fresh drain slabs.
- The demolition or dismantling process of the existing dilapidated footpaths and other built structures will be executed as per the reference drawings provided.
- Placing of edge kerb and pavers in the central plaza.
- Construction of ramps with Placement of bollards at entry and exit locations.
- Providing Pole lights for effective & sufficient lighting.
- Providing of soil & Planting of Flowering/non flowering plants & shrubs.
- Soil preparation and lawn/ground cover planting services.
- Implementation of lane markings & Stop lane; in addition to cat-eye markers.

- Placing sign boards & Arrow direction Marking.
- Providing HRPC for free turn road.

Extent of scope

Site Photos

2. BASAVESHWARA CIRCLE

Aim

Basaveshwara Circle is located at the intersection of several major roads including Race Course Road, Raj Bhavan Road, and Crescent Road. The area is well-served by public transportation, including BMTC buses and the Bangalore Metro (with stations like Cubbon Park and Vidhana Soudha nearby). It is a crucial junction for managing the traffic flow in central Bangalore, handling significant volumes of vehicular traffic. The junction sees a considerable amount of pedestrian traffic due to its central location and proximity to major landmarks and institutions such as Raj Bhavan, Bangalore Golf Club, Race Course, Vidhana Soudha, Mount Carmel College. Project aims to reduce vehicular-pedestrian conflicts, improve pedestrian infrastructure at the junction.

Site Data

Location - 12.9845902, 77.5881954

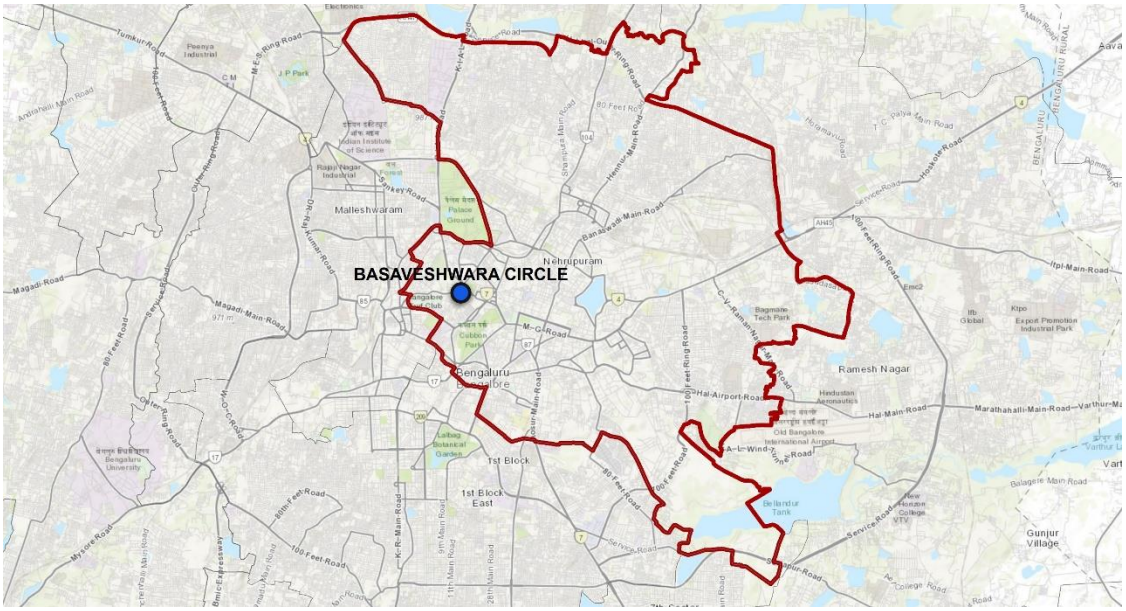

Major Scope of Works

- Drains undergo desilting to ensure the effective removal of sediments and waste materials, thereby preventing blockages and maintaining optimal drainage performance.
- Refurbishment of drains and installation of fresh drain slabs.
- The demolition or dismantling process of the existing dilapidated footpaths and other built structures will be executed as per the reference drawings provided.
- Placing of edge kerb and pavers in the central plaza.
- Construction of Ramp with Placement of bollards at entry and exit locations,
- Providing Pole lights for effective & sufficient lighting.
- Providing of soil & Planting of Flowering/non flowering plants & shrubs.
- Soil preparation and lawn/ground cover planting services.
- Implementation of lane markings & Stop lane; in addition to cat-eye markers.
- Placing sign boards & Arrow direction Marking.

Extent of scope

Site Photos

3. HENNUR CROSS

Aim

The circle situated in the northeastern part of the city and serves as a major junction It is a significant intersection in the Hennur area, connecting several major roads and facilitating traffic flow within the city. The junction is part of the rapidly developing area with a mix of residential, commercial, and educational establishments. This project aims to provide a safe and inclusive pedestrian infrastructure to the junction.

Site Data

Location - 13.0278, 77.6327

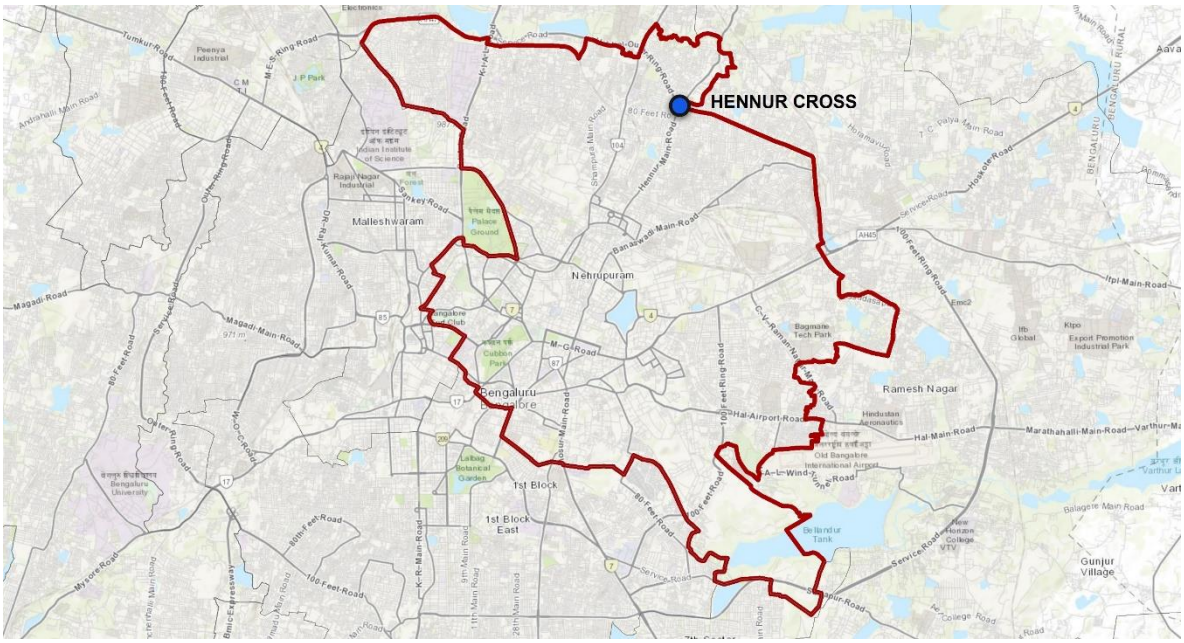

Major Scope of Works

- Drains undergo desilting to ensure the effective removal of sediments and waste materials, thereby preventing blockages and maintaining optimal drainage performance.
- Refurbishment of drains and installation of fresh drain slabs
- The demolition or dismantling process of the existing dilapidated footpaths and other built structures will be executed as per the reference drawings provided.
- Placing of edge kerb and pavers in the central plaza.
- Construction of Ramps with Placement of bollards at entry and exit locations,
- Providing Pole lights for effective & sufficient lighting.
- Providing of soil & Planting of Flowering/non flowering plants & shrubs.
- Soil preparation and lawn/ground cover planting services.
- Implementation of lane markings & Stop lane; in addition to cat-eye markers.
- Placing sign boards & Arrow direction Marking

Extent of scope

Site Photos

4. TRINITY CIRCLE

Aim

Trinity Circle is a prominent junction located in the heart of Bangalore. Trinity Circle is situated at the intersection of Mahatma Gandhi (MG) Road and Old Madras Road. It is part of the central business district of Bangalore, surrounded by commercial, residential, and institutional establishments. The area is well-served by public transportation, including the metro, BMTC buses, and auto-rickshaws. The junction experiences considerable pedestrian traffic due to the nearby metro station, commercial establishments, and recreational areas.The project aims to provide a better pedestrian infrastructure for enhancing safety, accessibility, and convenience for pedestrians.

Site Data

Location - 12.9724744, 77.6195532

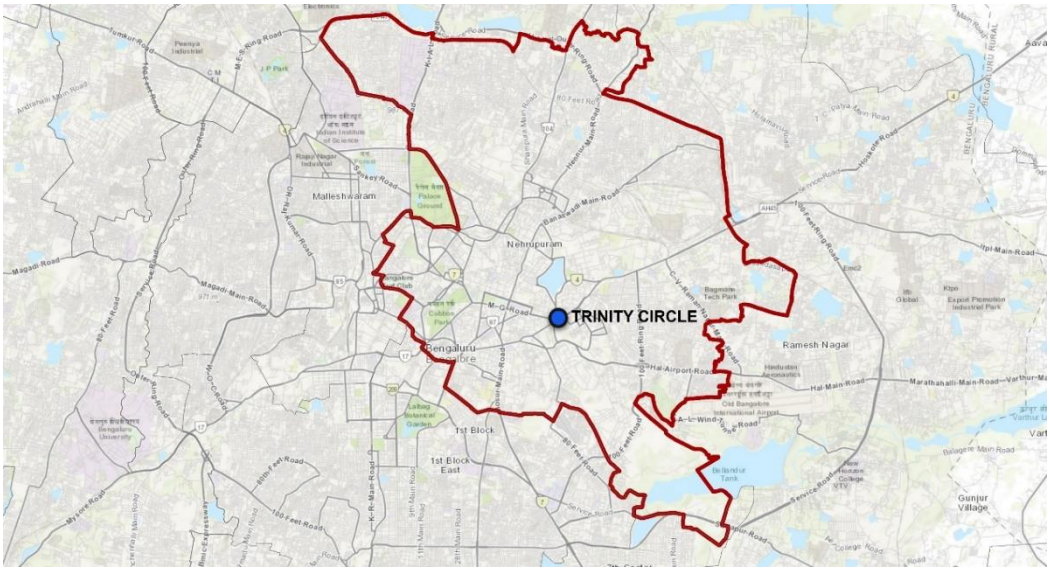

Major Scope of Works

- Drains undergo desilting to ensure the effective removal of sediments and waste materials, thereby preventing blockages and maintaining optimal drainage performance.
- Refurbishment of drains and installation of fresh drain slabs
- The demolition or dismantling process of the existing dilapidated footpaths and other built structures will be executed as per the reference drawings provided.
- Placing of edge kerb and pavers in the central plaza.
- Placement of bollards at entry and exit locations.
- Providing Pole lights for effective & sufficient lighting.
- Providing of soil & Planting of Flowering/non flowering plants & shrubs.
- Soil preparation and lawn/ground cover planting services.
- Implementation of lane markings & Stop lane; in addition to cat-eye markers.
- Placing sign boards & Arrow direction Marking
- Providing HRPC’s

Extent of scope

Site Photos

5. LH CIRCLE

Aim

The Junction is situated at the intersection of Palace Road and Ambedkar Veedhi (Dr. B.R. Ambedkar Road). The junction is part of the central administrative and governmental area of Bangalore. This Junction connects several important roads and provides access to key areas within Bangalore, including the central business district, government offices, and recreational spaces. The area is well-served by public transportation, including BMTC buses and auto-rickshaws. The nearby Cubbon Park Metro Station on the Purple Line provides excellent metro connectivity. The junction experiences considerable pedestrian traffic due to the proximity of government offices, courts, parks, and recreational facilities. The project aims to improve the pedestrian infrastructure at the junction for making it comfortable and inclusive.

Site Data

Location - 12.9812933, 77.5886079

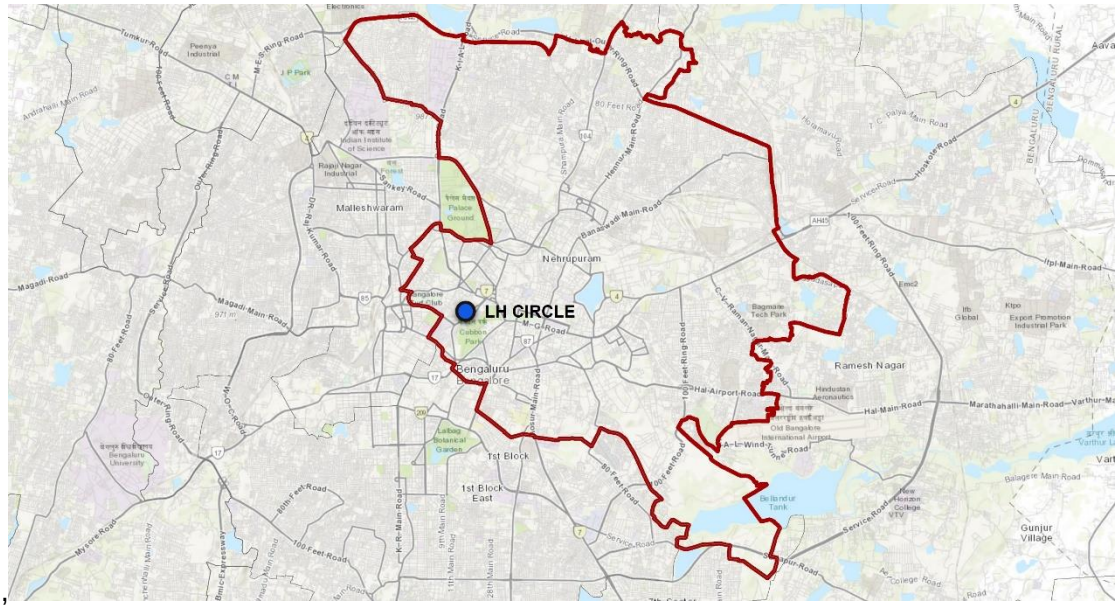

,

Major Scope of Works

- Placing of edge kerb and pavers in the central plaza.
- Placement of bollards at entry and exit locations,
- Providing Pole lights for effective & sufficient lighting.
- Providing of soil & Planting of Flowering/non flowering plants & shrubs.
- Soil preparation and lawn/ground cover planting services.
- Implementation of lane markings & Stop lane; in addition to cat-eye markers.
- Placing sign boards & Arrow direction Marking.
- Providing HRPC

Extent of scope

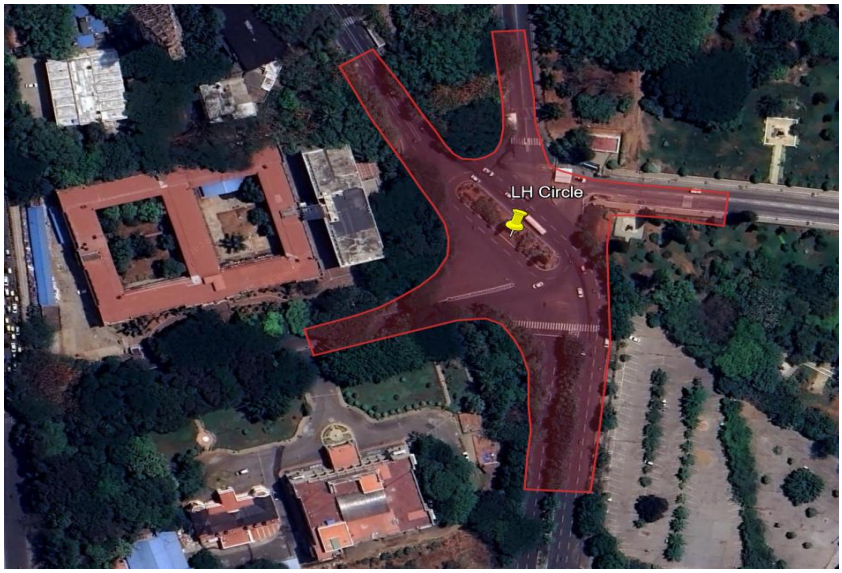

Site Photos

6. WINDSOR MANOR JUNCTION

Aim

Windsor Manor Junction is situated at the intersection of Sankey Road, Golf Course Road, and Railway Parallel Road. The junction is part of the central business and upscale residential area of Bangalore. The junction experiences considerable pedestrian traffic due to the presence of nearby hotels, recreational areas, and business establishments such as Windsor Manor Hotel, Bangalore Golf Club, Sankey Tank, Palace Grounds, Vidhana Soudha, Cantonment Railway Station.The project aims to upgrade pedestrian infrastructure at Windsor Manor Junction.

Site Data

Location - 12.993693, 77.585244

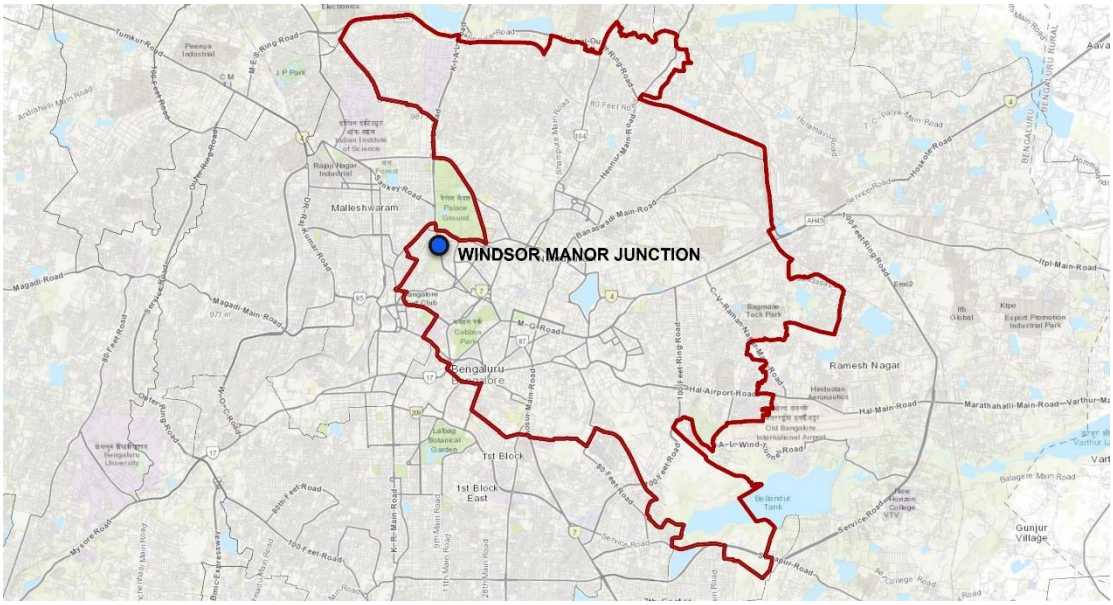

Major Scope of Works

- Drains undergo desilting to ensure the effective removal of sediments and waste materials, thereby preventing blockages and maintaining optimal drainage performance.
- Refurbishment of drains and installation of fresh drain slabs.
- The demolition or dismantling process of the existing dilapidated footpaths and other built structures will be executed as per the reference drawings provided.
- Placing of edge kerb and pavers in the central plaza.
- Placement of bollards at entry and exit locations,
- Providing Pole lights for effective & sufficient lighting.
- Providing of soil & Planting of Flowering/non flowering plants & shrubs.
- Soil preparation and lawn/ground cover planting services.
- Implementation of lane markings & Stop lane; in addition to cat-eye markers.
- Placing sign boards & Arrow direction Marking.

Extent of scope

Site Photos

7. SJP ROAD JUNCTION

Aim

SJP Road Junction, also known as Silver Jubilee Park Road Junction, is at the intersection of Silver Jubilee Park Road (SJP Road) and Avenue Road. The junction is part of the commercial and historical area of Bangalore, characterized by its vibrant market activities and dense urban setting. The junction handles significant vehicular and pedestrian traffic volumes, especially due to the markets, commercial establishments, and historical landmarks in the surrounding areas such as KR Market, Town Hall, Chickpet, Victoria Hospital, Tipu Sultan's Summer Palace.The project aims to enhance the safety, accessibility, and convenience for pedestrians.

Site Data

Location - 12.9779746, 77.584672

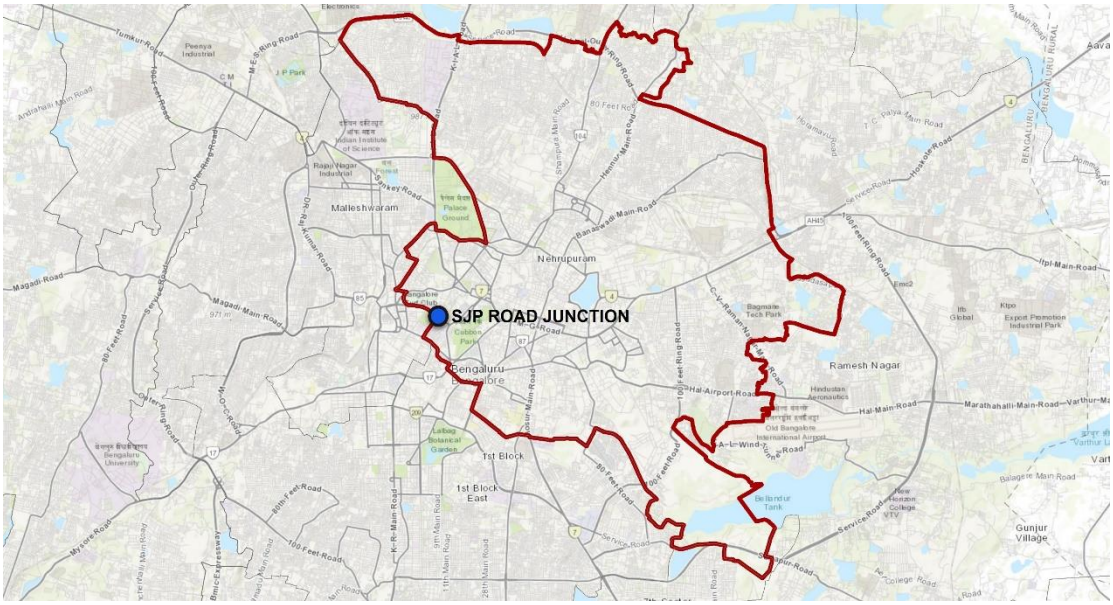

Major Scope of Works

- The demolition or dismantling process of the existing dilapidated footpaths and other built structures will be executed as per the reference drawings provided.
- Placement of bollards at entry and exit locations,
- Providing Pole lights for effective & sufficient lighting.
- Implementation of lane markings & Stop lane; in addition to cat-eye markers.
- Placing sign boards & Arrow direction Marking.
- Providing height gauge fabrication

Extent of scope

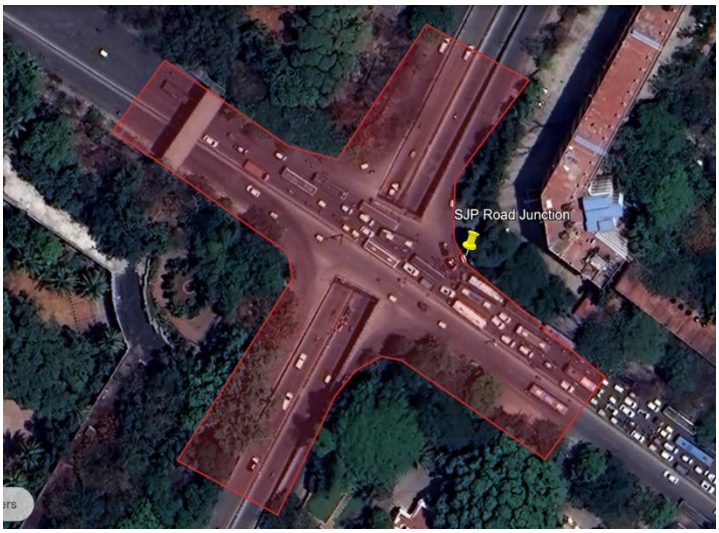

Site Photos